

Convection Heat Transfer of Nanofluids in Commercial Electronic Cooling Systems

N.A. Roberts and D.G. Walker

Department of Mechanical Engineering
Vanderbilt University

InterPACK '09

San Francisco, California, USA

July 23, 2009


Sponsor:

Oak Ridge National Laboratory



Nanofluids are colloidal suspensions of nanoparticles in a base fluid

- Typical nanofluid properties
 - particles are metals, metal oxides or carbon in various forms
 - particles range in size between 1 and 100 nm
 - base fluid usually water and organic liquids
- Benefits of nanofluids
 - reduced sedimentation and viscosity
 - reduced damage to internal system components
- Effects of nanofluids
 - *have shown an enhancement in thermal conductivity*
 - have shown enhancement in convective heat transfer in well controlled systems - can they be used in real systems

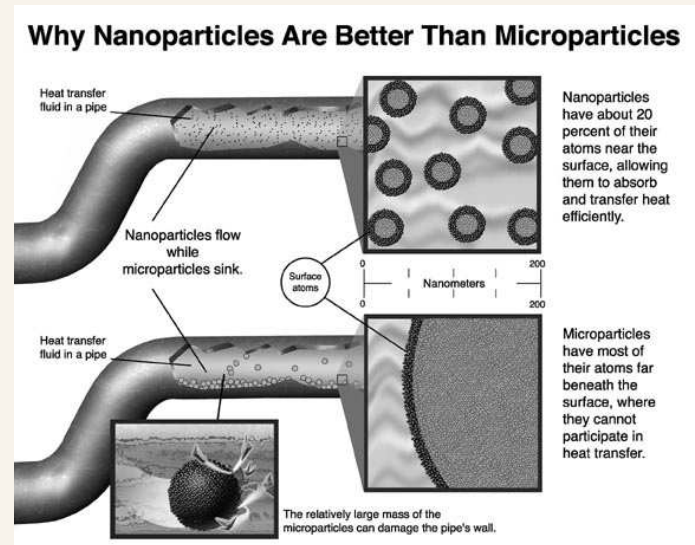


http://www.anl.gov/Media_Center/News/2004/nanofluidsbig.html




Why do nanofluids exhibit enhancement of thermal conductivity over effective medium theories?




1. Brownian motion results in micro/nanoconvection around particles
2. Ordering of liquid near the liquid/solid interface
3. Near field radiation between particles
4. No actual enhancement over theory, but a clustering into spherical or linear chains of particles while models assume well dispersed solutions

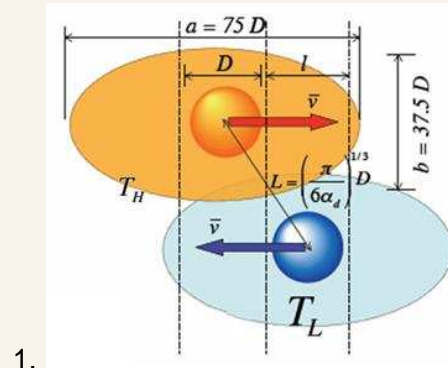

http://www.mae.ncsu.edu/research/ck_CM-P_Lab/nanoflow.htm

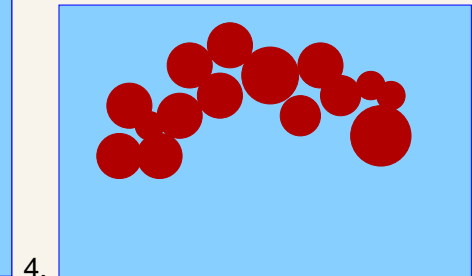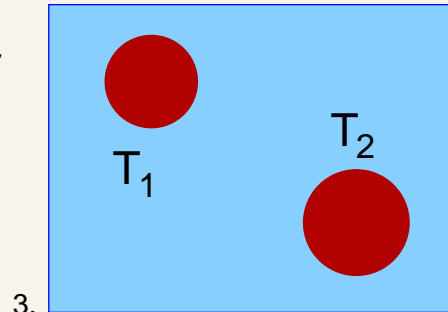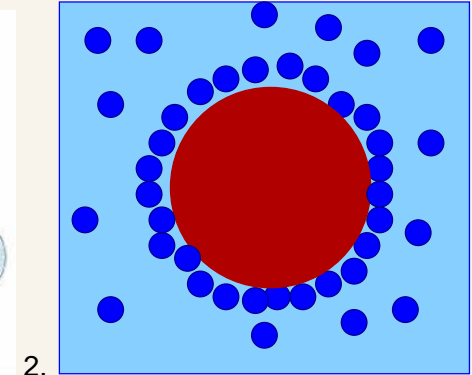

Straight Tube Setup

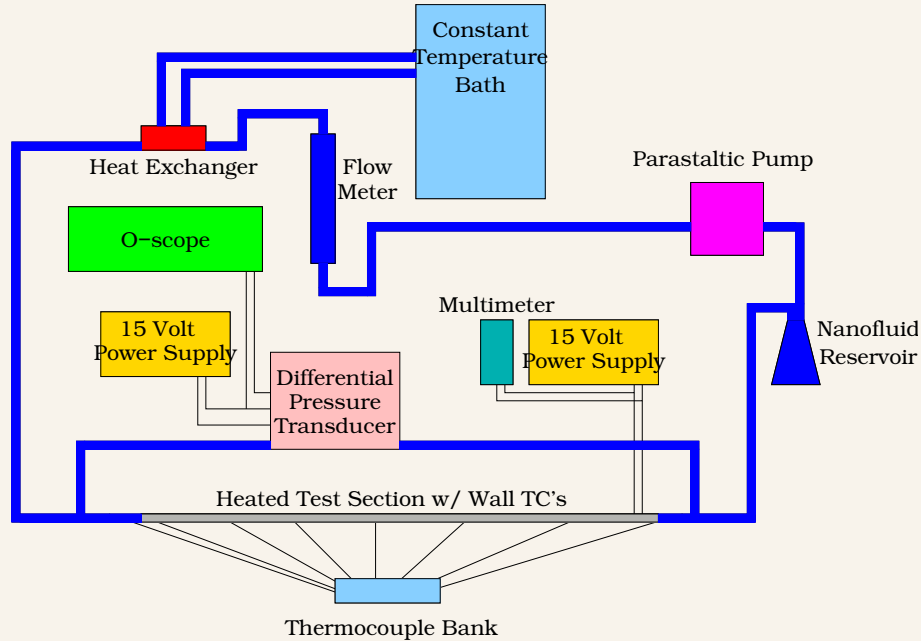

Key measurements



- pressure drop along test section
- temperature profile along outside of test section
- inlet and outlet fluid temperatures
- heat dissipation from heater wire
- volumetric flow rate


Test section properties

d_i (mm)	d_o (mm)	l (m)
1.07	1.47	0.91




Commercial System Setup

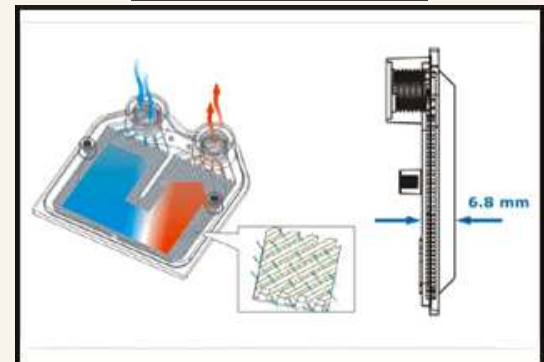

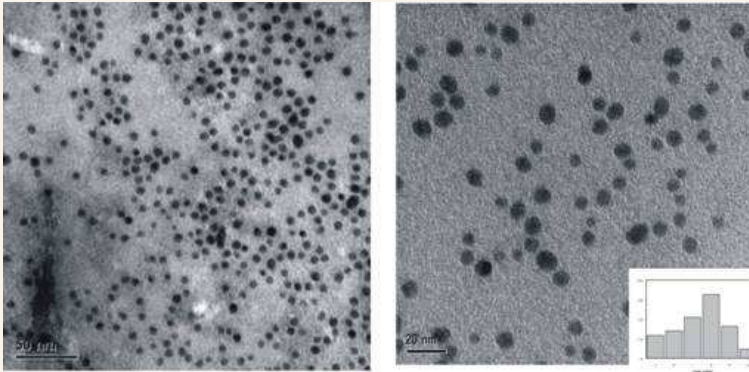

http://miam.physics.mcgill.ca/miam/images/research/self-assembly/lennox_nanoparticle.jpg

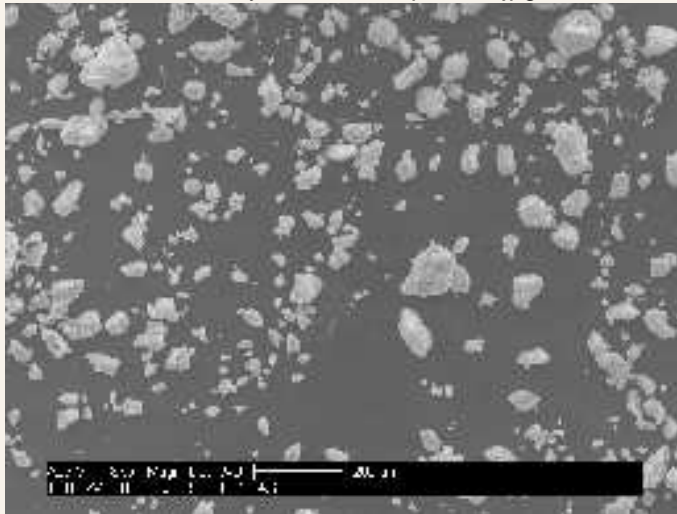

Lai et al., 2008



- Nanoparticles (Al_2O_3)
 - γ 10 nm
 - γ 20-30 nm
- Preparation
 - Nanoparticles are weighed and added to de-ionized water for different particle loadings
 - Nanoparticles are ultrasonicated for 1 hour to break up agglomerates
- Results from DLS

Particle (nm)	10	20-30
Ave. Part. Size (nm)	148.7	253.8
poly disp.	0.783	0.277

Results: Pressure and Temperature Drop/Increase




- Nearly equal pressure drop across the tube for all fluids
- Deviation from theoretical pressure drop for DI-water due to entrance effects and surface roughness

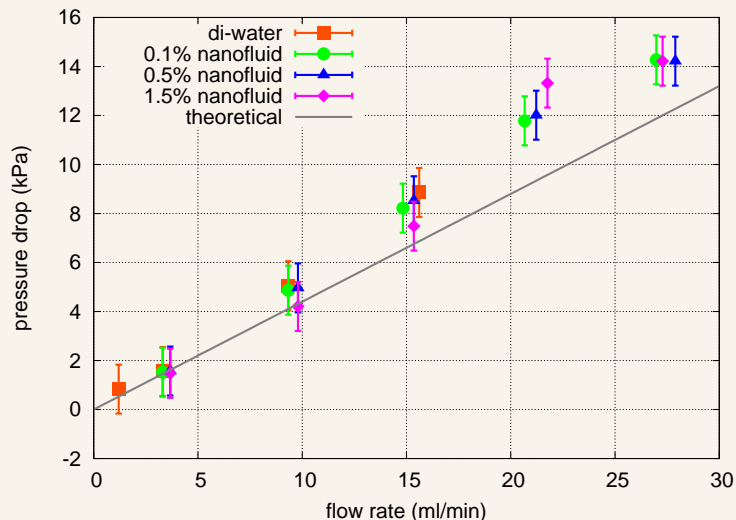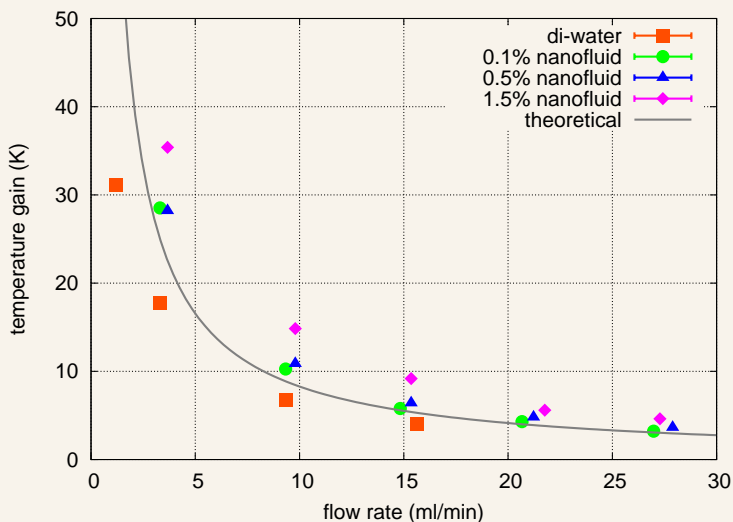



- Nearly equal temperature gain across the heated tube for the DI-water and the 0.5% nanofluid
- Greater temperature gain in the 1.5% nanofluid due to enhanced convective heat transfer

Results: Average Convection Heat Transfer Coefficients

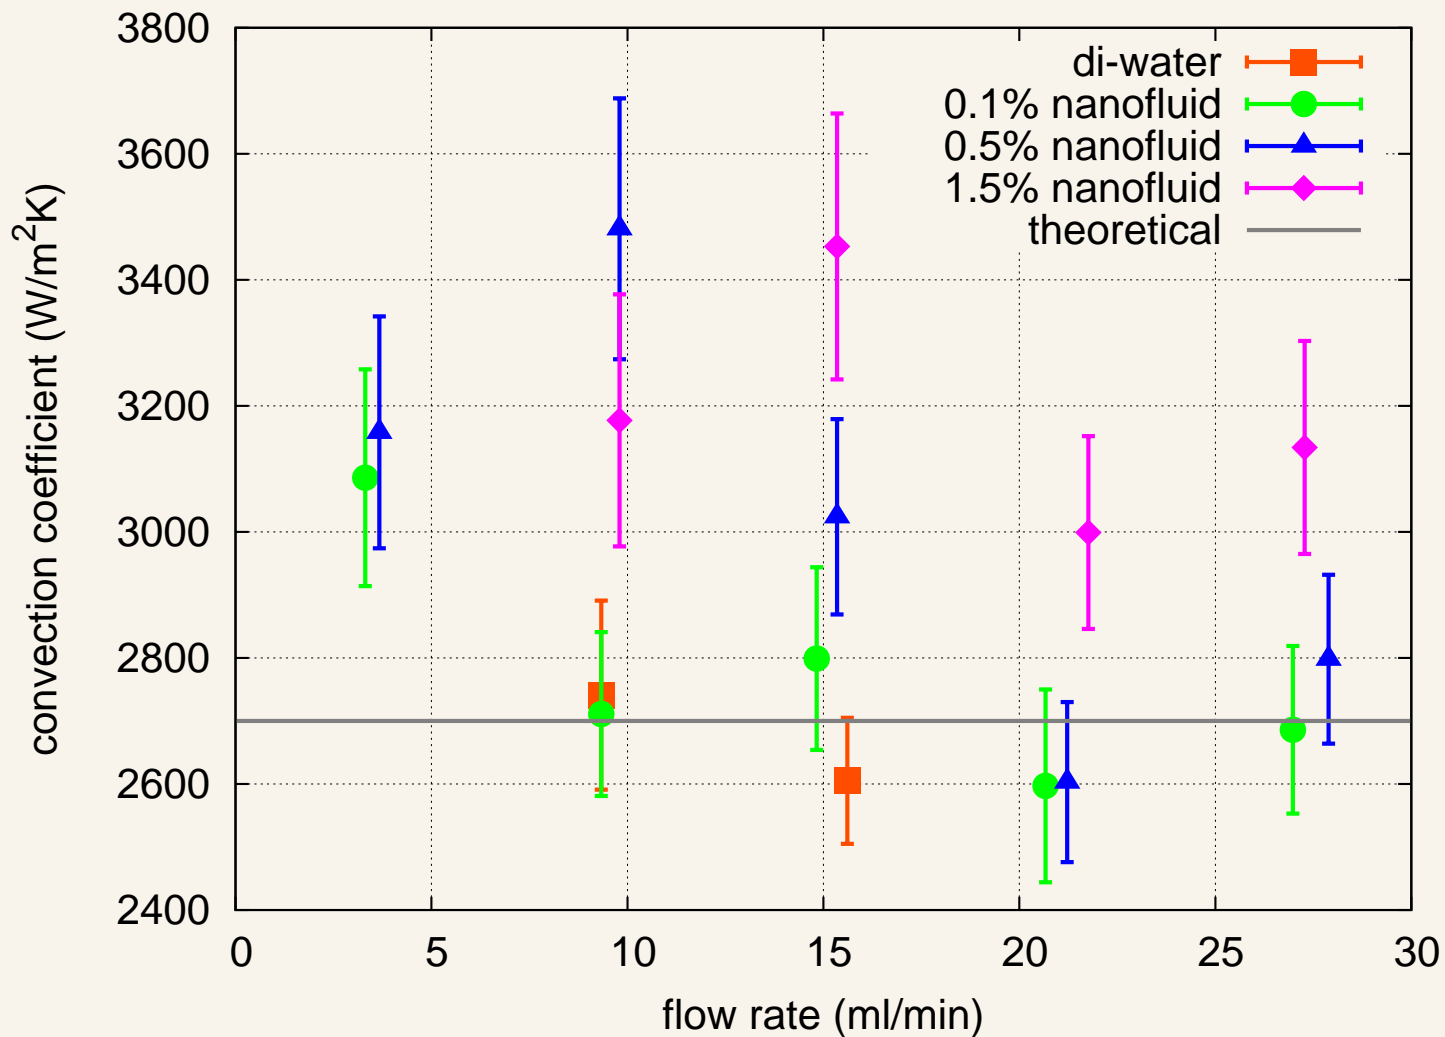

Results: Calculated Thermal Conductivity

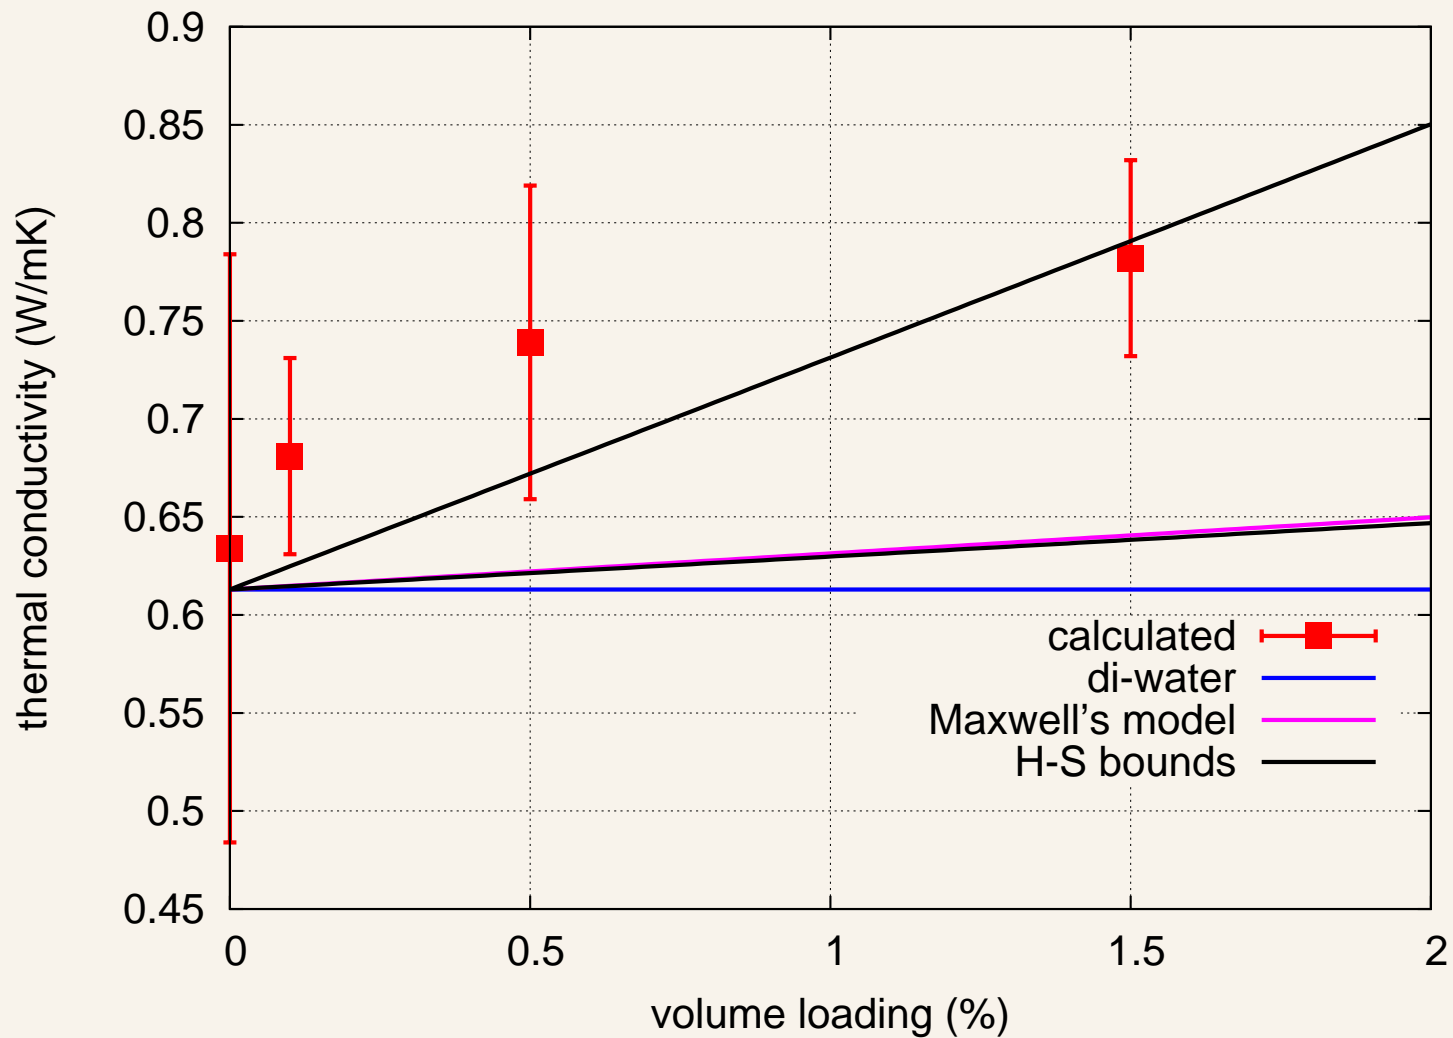

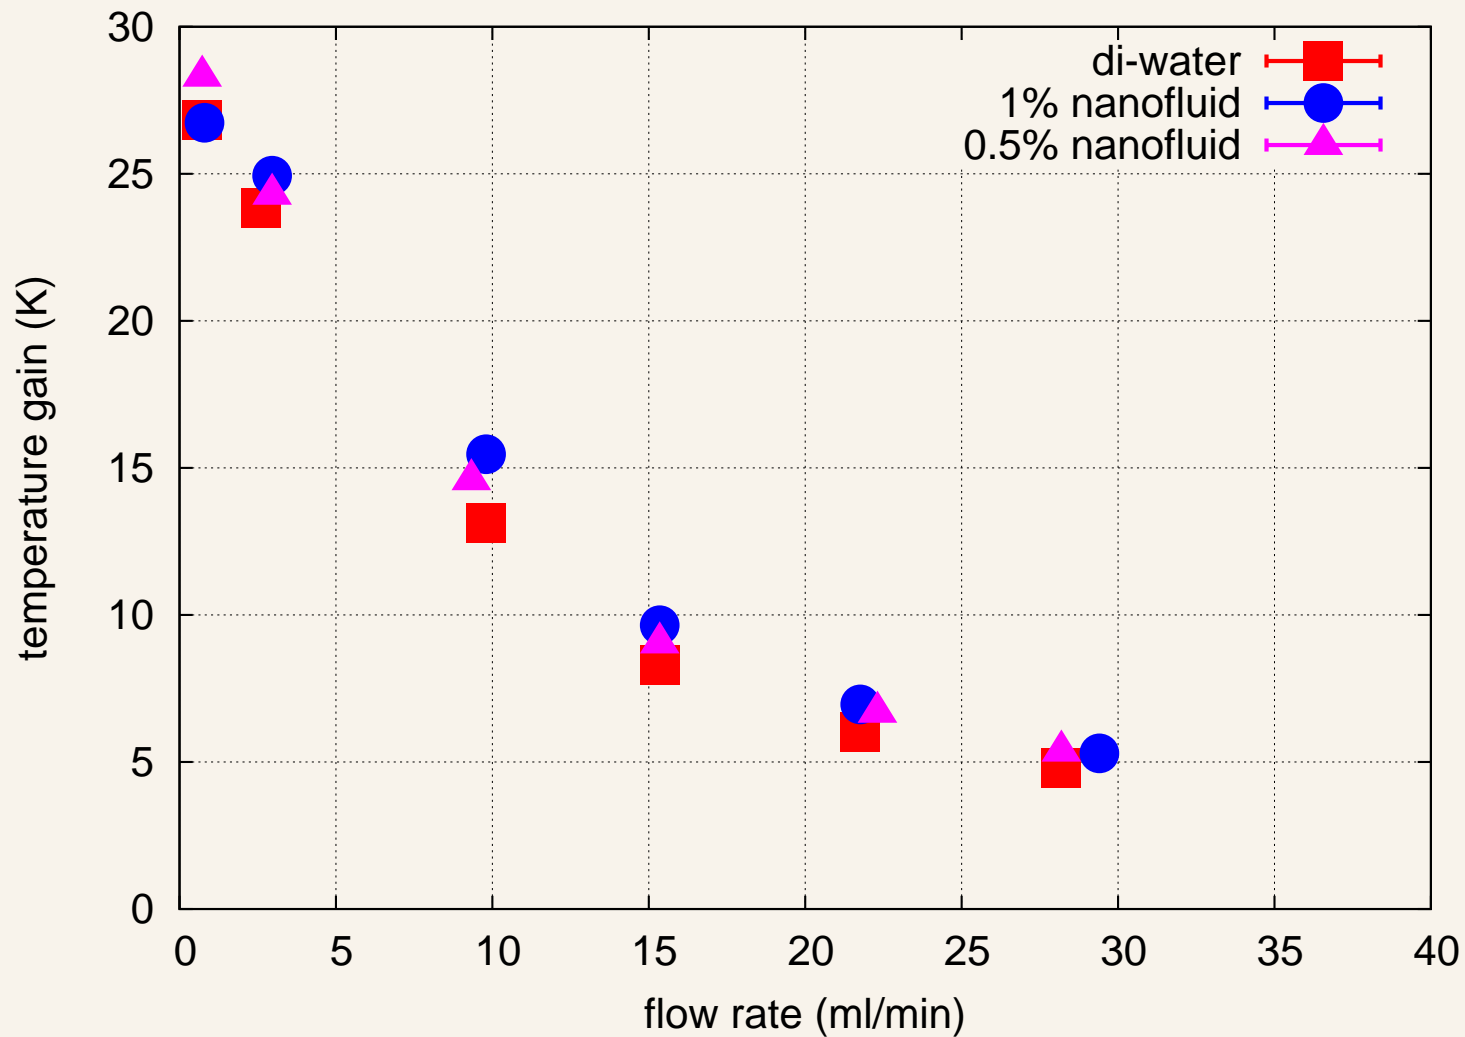



- Observed enhancement in convective performance without an increase in viscosity
- Calculated enhancement thermal conductivity with increasing volume loading within the Hashin-Shtrickman Bounds
- Keblinski's recent theory is supported by our results